



司騰達股份有限公司
BHP Industry Solution

PROFINET

EtherCAT

EtherNet/IP

CC-Link

Modbus

PROFIBUS

CANopen

HMS Connecting Devices

VPN

Now with ...
OPC UA

X-Gateway

DeviceNet

WiFi



司騰達股份有限公司

HMS 台灣總代理 – Remote Access 跨國遠端連線與自動化工業的最佳選擇

司騰達公司致力於推廣數位化工廠和 IIoT 工業物聯網的解決方案，並與歐洲最先進的公司 – HMS 集團合作，同時透過引進更多歐美的技術能量，提供客戶關於工業 4.0 的顧問諮詢服務，並將教育與產業連結，協助台灣產業逐步完成從現場設備、生產資訊、通訊 IoT 的垂直整合，並整合 M2M 工業總線與軟體開發，從而實現數位化工廠與自動化機械領域的創新。



司騰達聯絡訊息


臺北客服專線：(02)-2242-1625

台中客服專線：(04)-2451-0611

客服信箱：sales@bhp.com.tw

Line ID：@bhp.tw

www.bhp.com.tw

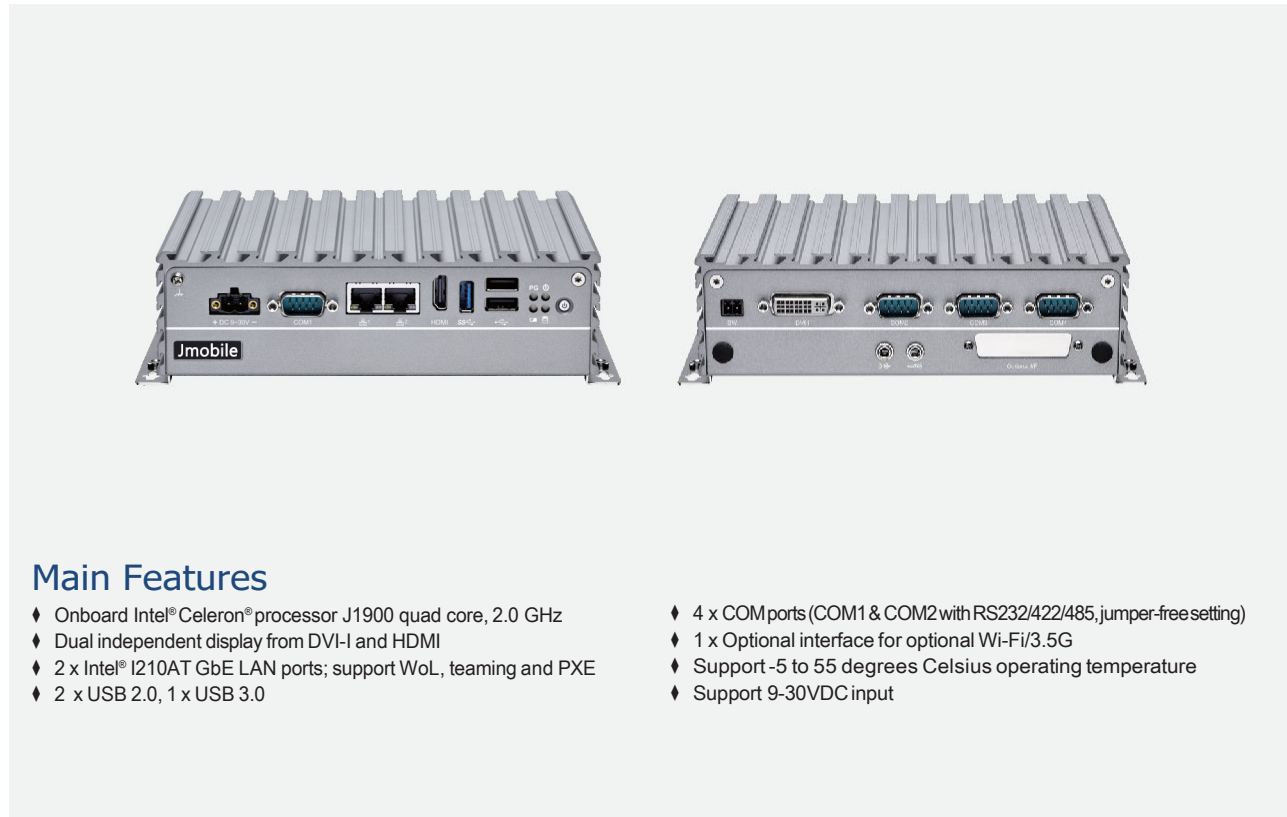

Main Features

- ◆ Onboard Intel® Celeron® processor J1900 quad core, 2.0 GHz
- ◆ Dual independent display from DVI-I and HDMI
- ◆ 2 x Intel® I210AT GbE LAN ports; support WoL, teaming and PXE
- ◆ 2 x USB 2.0, 1 x USB 3.0
- ◆ 4 x COM ports (COM1 & COM2 with RS232/422/485, jumper-free setting)
- ◆ 1 x Optional interface for optional Wi-Fi/3.5G
- ◆ Support -5 to 55 degrees Celsius operating temperature
- ◆ Support 9-30VDC input

Product Overview

Powered by Intel® Celeron® processor (formerly codenamed "Bay Trail"), the NISE 105U provides outstanding performance not only on computing but also on graphics, and it presents a brand new opportunity for both intelligent and industrial computing solutions. Up to 8G DDR3L memory, NISE 105U have several options on storage devices like M.2, HDD and SSD. The NISE 105U support wide DC input range from 9-30VDC. The NISE 105U has high integration ability with optional mini-PCIe module and 4 x COM ports, which makes it a real intelligent system for various applications such as factory automation applications, network applications (with optional GbE LAN, Wi-Fi, 3.5G/4G LTE module) and communication applications (with optional GPIO, RS232/422/485). NISE 105U is definitely the top choice for M2M intelligent system and factory automation platforms.

Specifications

CPU Support

- ◆ Onboard Intel® Celeron® processor J1900 quad core, 2.0 GHz

Main Memory

- ◆ 1 x DDR3L SO-DIMM socket, support DDR3L 1066/1333 8GB RAM max., un-buffered and non-ECC

Display Option

- ◆ Dual independent display
 - HDMI and DVI-I
 - HDMI and VGA (via DVI-I to VGA converter)

I/O Interface-Front

- ◆ ATX power on/off switch
- ◆ 1 x Power status/1 x HDD access/1 x battery low/1 x programing LEDs
- ◆ 2 x Intel® I210AT GbE LAN ports; support WoL, teaming and PXE
- ◆ 1 x HDMI
- ◆ 1 x USB 3.0 (900mA per each)
- ◆ 2 x USB 2.0 (500mA per each)
- ◆ 1 x DB9 for COM1 support RS232/422/485 with auto flow control
 - Jumper-free setting on RS232/422/485
- ◆ 1 x 2-pin DC input, support +9 to 30VDC input


I/O Interface - Rear

- ◆ 1 x Remote power on/off switch
- ◆ DVI-I display output
- ◆ 1 x DB9 for COM2, support RS232/422/485 with auto flow control
 - Jumper-free setting on RS232/422/485
- ◆ 2 x DB9 for COM3 & COM4 support RS232 only
- ◆ Storage Device
 - ◆ 1 x 2.5" 128G SSD

Power Requirement

- ◆ Power input: +9VDC to +30VDC

Dimension Drawing

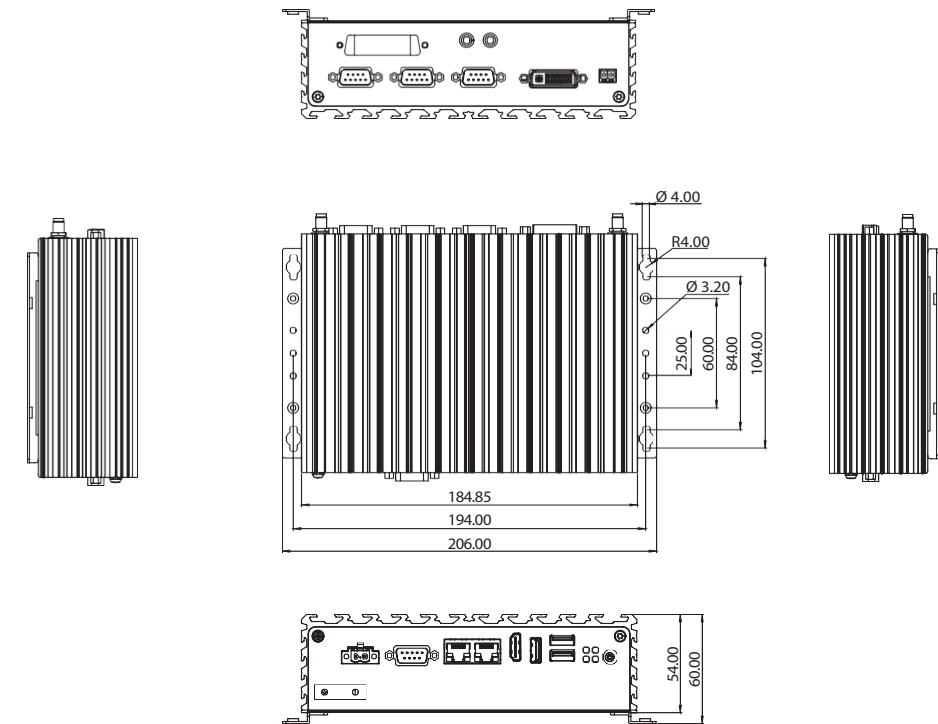

Support OS

- ◆ Windows 10 IoT Enterprise, 64-bit
- ◆ Linux Kernel version 3.8.0

Dimensions

- ◆ 185mm (W) x 131mm (D) x 54mm (H) without wall-mount bracket

Construction

- ◆ Aluminum and metal chassis with fanless design

Environment

- ◆ Operating temperature
 - Ambient with air flow: -5°C to 55°C (according to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- ◆ Storage temperature: -30°C to 85°C
- ◆ Relative humidity: 10% to 95% (non-condensing)
- ◆ Shock protection
 - HDD: 20G, half sine, 11ms, IEC60068-2-27
 - M.2: 50G, half sine, 11ms, IEC60068-2-27

Vibration protection w/HDD condition

- Random: 0.5Grms @ 5~500Hz, IEC60068-2-64
- Sinusoidal: 0.5Grms @ 5~500Hz, IEC60068-2-6

Vibration protection w/M.2 & SSD condition

- Random: 2Grms @ 5~500Hz, IEC60068-2-64
- Sinusoidal: 2Grms @ 5~500Hz, IEC60068-2-6

Certifications

- ◆ CE
- ◆ FCC Class A

Ordering Information

- ◆ NISE105-JM-BHP-A1
Intel® Celeron® Processor J1900 Quad Core fanless system
- ◆ 24V, 60W AC/DC power adapter w/o power cord (P/N: 7400060032X00)

型號：NISE105-JM-BHP-A1



司騰達股份有限公司

自動化工業與跨國遠端連線的最佳選擇

Ewon Flexy205


VPN+IOT 物聯網模組



Anybus X-Gateway



CODESYS SoftPLC



Jmobile Runtime IPC



I4-SCADA IPC



工業 4.0 數位工廠與 工業物聯網解決方案

SIEMENS PLC
S7-1200



SIEMENS PLC
ET 200SP IO



SIEMENS PLC
S7-1500



SIEMENS HMI



司騰達股份有限公司

台北營業所：23558 新北市中和區中山路 2 段 299 號 5 樓之 1

Tel：(02)-2242-1625 Fax：(02)-2242-1605

台中營業所：40760 台中市西屯區廣福路 186 號

Tel：(04)-2451-0611 Fax：(04)-2451-0612

E-mail：sales@bhp.com.tw

Line ID：@bhp.tw



司騰達股份有限公司
BHP Industry Solution



了解更多產品詳細資訊請上官網查詢
www.bhp.com.tw